


The reproduction and/or divulgation of this drawing or its included informations is strictly prohibited unless authorized by the owning company DUCATI S.p.A.
E' vietata la riproduzione e/o la divulgazione di questo disegno unitamente alle informazioni in esso contenute senza l'autorizzazione della DUCATI S.p.A.

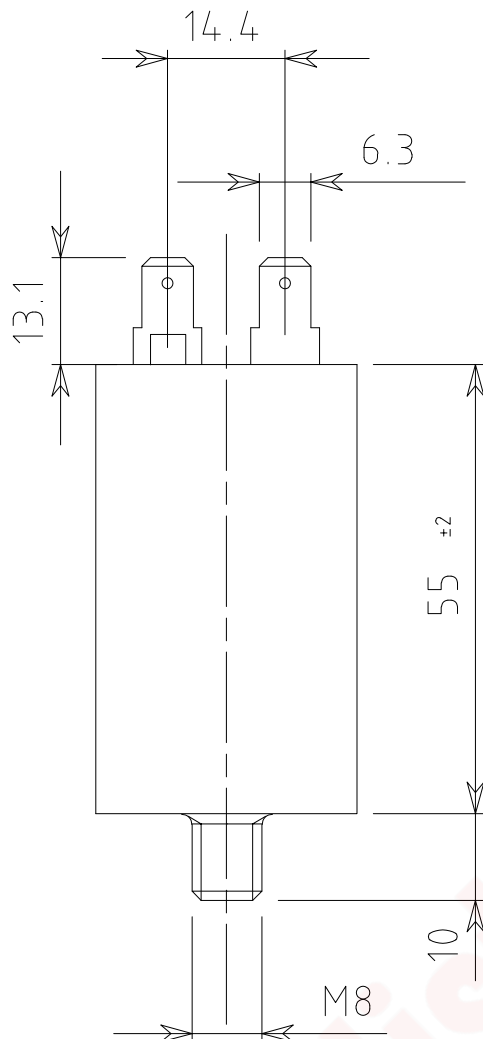

Characteristics: Self healing metallized

polypropylene film, dry
sealed with resin.

Case and sealing cover
in self-extinguishing
plastic material.

Cover material properties:

Ball pressure test (IEC 60695-10-2): 125°C

Glow wire test (IEC 60695-2-11): 850°C

Tracking resistance (IEC 60112): $\geq 250V$

DUCATI code: 416172364

Capacitance Tolerance: 1,5 $\mu F \pm 5\%$

Test voltage (routine test):

Between terminals: 950Vac 2sec

Climatic category: -25/85/21

Protection degree: IP 00

Operation classes and approvals: see marking

Reference standards: EN60252-1

Marking



DUCATI
energia

16.17.23..

1,5 $\mu F \pm 5\%$

425V ~ 30000h/c.l.A

475V ~ 10000h/c.l.B

500V ~ 3000h/c.l.C

-25/85/21 P0



EN 60252-1

made in E.U.

Ed.	Descrizione/Description							Data/Date	Firma/Sign.
MODIFICHE/REVISIONS									
DUCATI energia s.p.a.		TOLL. QUOTE LIBERE (TOLERANCE RATE) UNI-ISO 2768-m	TOLL. QUOTE LIBERE ANG. (ANG. TOLERANCE RATE)	SCALA/SCALE	DATA/DATE	FIRMA/DRAWN	VISTO/CHECKED		
					02/10/2007	Mollica			
	OGGETTO/PART NAME Dimensions for metallized polypropylene film capacitor for A.C. use.					CODICE/PART NR. 416172364			
					EDIZ./EDIT.				