CERTIFICATION OF THE QUALITY SYSTEM OF THE COMPANIES

UNI EN 29001
ISO 9001

Member of

The reproduction and/or divulgation of this drawing or its included informations is strictly prohibited unless authorized by the owning company DUCATI S.p.A.

E' vietata la riproduzione e/o la divulgazione di questo disegno unitamente alle informazioni in esso contenute senza l'autorizzazione della DUCATI S.p.A.

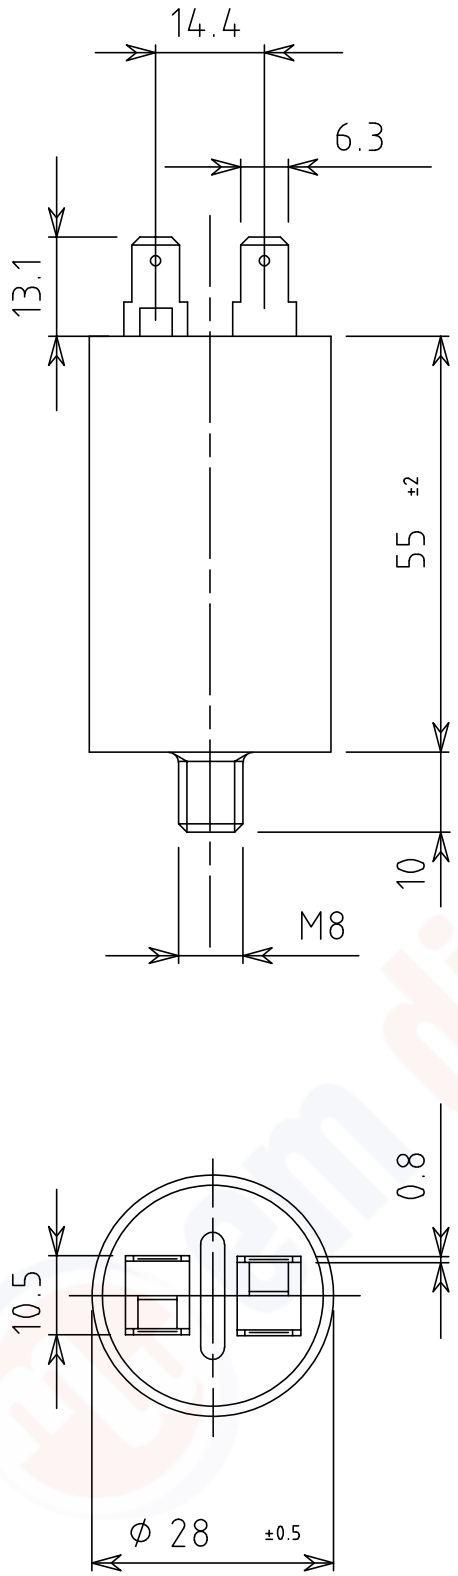

Characteristics:
Self healing metallized polypropylene film, dry sealed with polyurethane resin.
Case and sealing cover in self-extinguishing plastic material (V2 class according UL-94 test).

Cover material properties:
Ball pressure test (IEC 60695-10-2): 125°C
Glow wire test (IEC 60695-2-11): 850°C
Tracking resistance (IEC 60112):>= 250V

DUCATI code: 416100264

Capacitance / Tolerance: 2,5μF ±5%

Test voltage (routine test):

Between terminals: 950Vac 2sec

Climatic category: -25/85/21

Protection degree: IP 00

Operation classes and approvals: see marking

Reference standards: EN60252-1/A1

Marking

DUCATI energia
416.10.02..
2,5 μF ±5%
425V ~10000h/cl.B
475V ~ 3000h/cl.C
-25/85/21 S0
50-60 Hz

EN 60252-1/A1

Ed.	Descrizione/Description	Data/Date	Firma/Sign.
A	General revision	06/09/22	E. Parm.

MODIFICHE/REVISIONS

DUCATI energia s.p.a.

TOLL. QUOTE LIBERE (TOLERANCE RATE)	TOLL. QUOTE LIBERE ANG. (ANG. TOLERANCE RATE)	SCALA/SCALE	DATA/DATE	FIRMA/DRAWN	VISTO/CHECKED
mm UNI-ISO 2768-m			05/04/2012	Mollica	

OGGETTO/PART NAME
Dimensions for metallized polypropylene film capacitor for A.C. use.

CODICE/PART NR. 416100264
EDIZ./EDIT. A