


The reproduction and/or divulgation of this drawing or its included informations is strictly prohibited unless authorized by the owning company DUCATI S.p.A.
E' vietata la riproduzione e/o la divulgazione di questo disegno unitamente alle informazioni in esso contenute senza l'autorizzazione della DUCATI S.p.A.

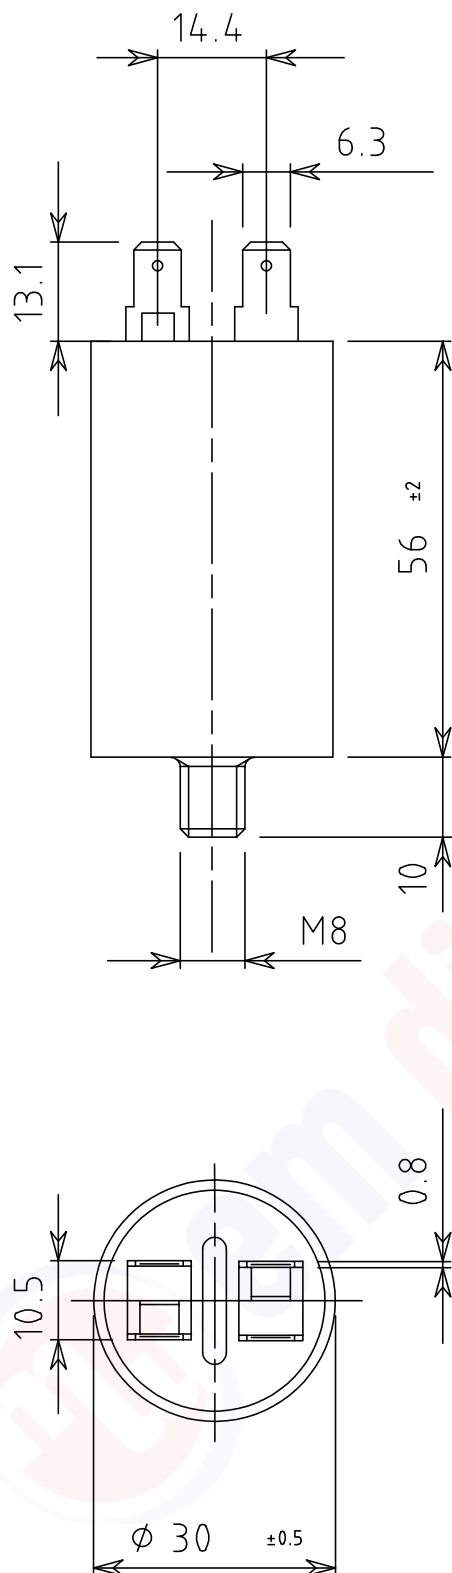

Characteristics:

Self healing metallized polypropylene film,
dry sealed with polyurethane resin.

Case and sealing cover in self-extinguishing
plastic material (V2 class according UL-94 test).

Cover material properties:

Ball pressure test (IEC 60695-10-2): 125°C

Glow wire test (IEC 60695-2-11): 850°C

Tracking resistance (IEC 60112): ≥ 250V

DUCATI code: 416108564

Capacitance / Tolerance: 7μF ±5%

Test voltage (routine test):

Between terminals: 950Vac 2sec

Climatic category: -25/85/21

Protection degree: IP 00

Operation classes and approvals: see marking

Reference standards: EN60252-1/A1

Marking



416.10.85..

7 μF ±5%

425V ~ 10000h/cl.B


475V ~ 3000h/cl.C

-25/85/21 S0

50-60 Hz



EN 60252-1/A1

A	Marking update							21/09/22	E. Parm	
Ed.	Descrizione/Description							Data/Date	Firma/Sign.	
MODIFICHE/REVISIONS										
DUCATI energia s.p.a.			TOLL. QUOTE LIBERE (TOLERANCE RATE)	TOLL. QUOTE LIBERE ANG. (ANG. TOLERANCE RATE)	SCALA/SCALE	DATA/DATE	FIRMA/DRAWN	VISTO/CHECKED		
			UNI-ISO 2768-m			13/04/2006	Mollica			
			OGGETTO/PART NAME					CODICE/PART NR.		
		Dimensions for metallized polypropylene film capacitor for A.C. use.					416108564			
							EDIZ./EDIT. A			