




Member of



Stripping tinned

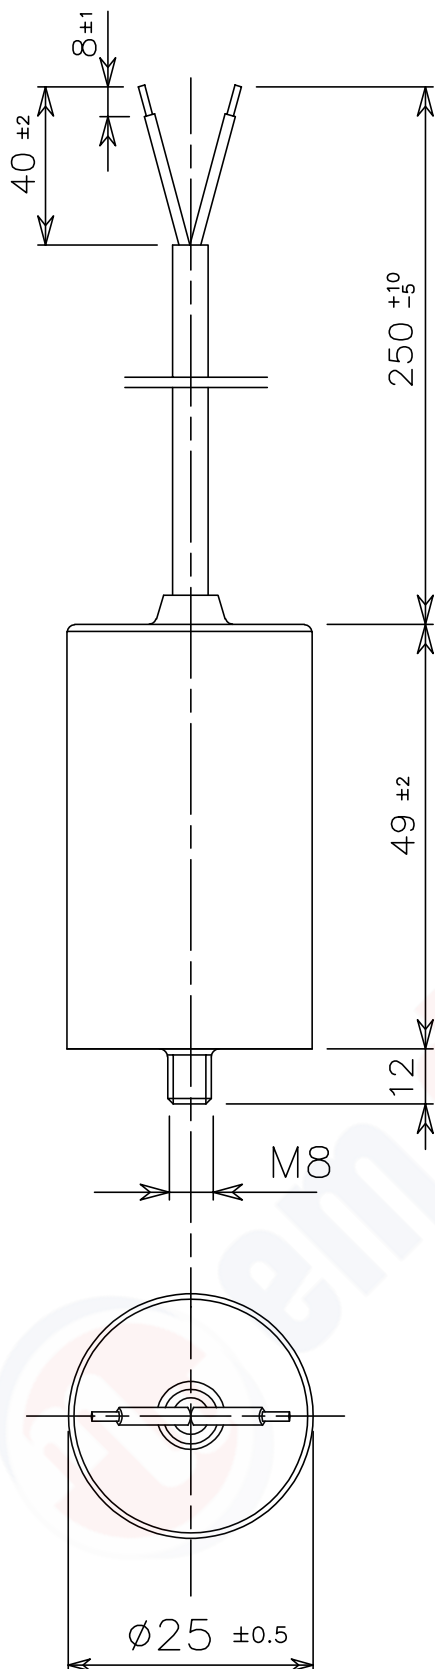

Characteristics:

self healing metallized
polypropylene film, dry
sealed with polyurethane resin.
Case and sealing cover
in self-extinguishing
plastic material
(V2 class according UL-94 test).

Cable: flexible annealed copper cord
2x0.75mmq insulated with PVC
temperature resistance 90°C
type H05V2V2-F

Capacitance/Tolerance: 3 μ F $\pm$ 5%

DUCATI part number: 416103314

Climatic category: -25/85/21

Operation classes and approvals: see marking

Reference standards: EN60252-1/A1

Marking:



416.10.33..

3 μ F $\pm$ 5%

425V ~ 10000h/cl.B

475V ~ 3000h/cl.C

-25/85/21 S0

50-60 Hz



EN 60252-1/A1

Ed.	Descrizione/Description							Data/Date	Firma/Sign.	
MODIFICHE/REVISIONS										
DUCATI energia s.p.a.		TOLL. QUOTE LIBERE (TOLERANCE RATE) UNI-ISO 2768-m	TOLL. QUOTE LIBERE ANG. (ANG. TOLERANCE RATE)	SCALA/SCALE	DATA/DATE	FIRMA/DRAWN	VISTO/CHECKED			
					20/09/2022	E. Parm.				
		OGGETTO/PART NAME					CODICE/PART NR.			
		Dimensions for metallized polypropylene film capacitor for A.C. use					416103314			
							EDIZ./EDIT.			

The reproduction and/or divulgation of this drawing or its included informations is strictly prohibited unless authorized by the owning company DUCATI energia s.p.a.
E' vietata la riproduzione e/o la divulgazione di questo disegno unitamente alle informazioni in esso contenute senza l'autorizzazione della DUCATI energia s.p.a.