


The reproduction and/or divulgation of this drawing or its included informations is strictly prohibited unless authorized by the owning company DUCATI S.p.A.
E' vietata la riproduzione e/o la divulgazione di questo disegno unitamente alle informazioni in esso contenute senza l'autorizzazione della DUCATI S.p.A.

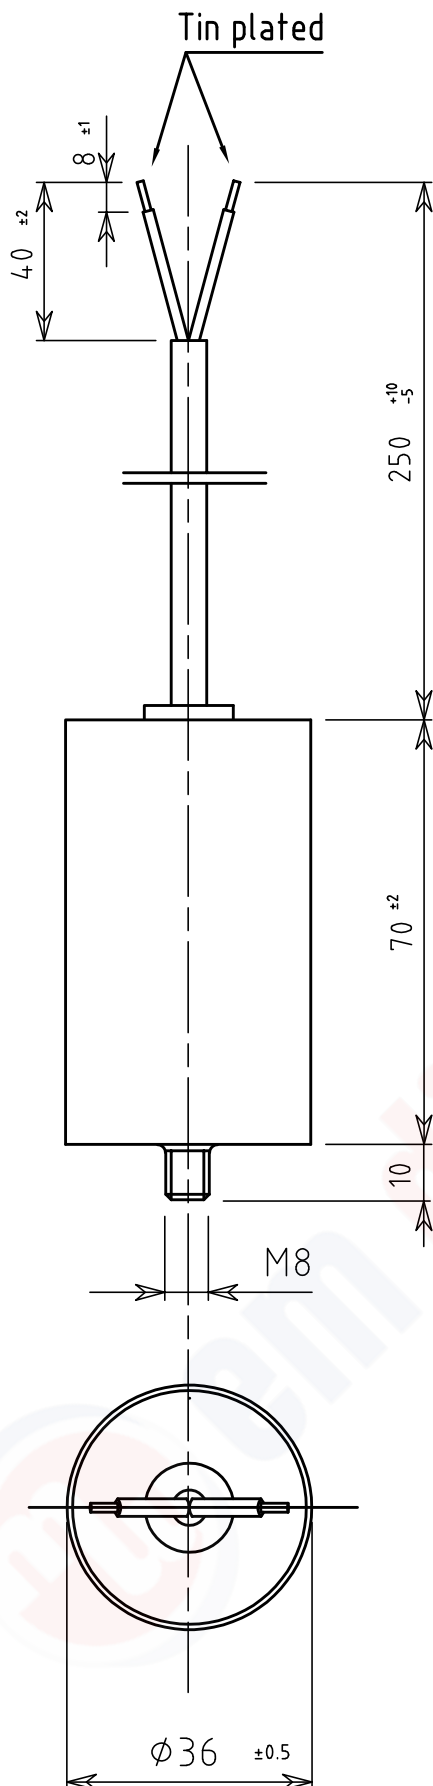

Characteristics: self healing metallized polypropylene film, dry sealed with polyurethane resin. Case and sealing cover in self-extinguishing plastic material (V2 class according UL-94 test).

Cable: flexible annealed copper cord
2x0.75mmq insulated with PVC
temperature resistance 90°C

Capacitance / Tolerance: 15µF±5%

DUCATI part number: 416102214

Climatic category: -25/85/21

Protection degree: IP54

Operation classes and approvals: see marking

Reference standards: EN60252-1/A1

Marking:



416.10.22..

15 µF ±5%

425V~ 10000h/cl.B


475V~ 3000h/cl.C

-25/85/21 S0

50-60 Hz



EN 60252-1/A1

Ed.	Descrizione/Description							Data/Date Firma/Sign	
MODIFICHE/REVISIONS									
DUCATI energia s.p.a.		TOLL. QUOTE LIBERE (TOLERANCE RATE) UNI-ISO 2768-m	TOLL. QUOTE LIBERE ANG. (ANG. TOLERANCE RATE)	SCALA/SCALE	DATA/DATE	FIRMA/DRAWN	VISTO/CHECKED		
					19/09/2022	E. Parmeggiani			
		OGGETTO/PART NAME					CODICE/PART NR.		
		Dimensions for metallized polypropylene film capacitor for A.C. use.					416102214		
					EDIZ./EDIT.				