


The reproduction and/or divulgation of this drawing or its included informations is strictly prohibited unless authorized by the owning company DUCATI S.p.A.
E' vietata la riproduzione e/o la divulgazione di questo disegno unitamente alle informazioni in esso contenute senza l'autorizzazione della DUCATI S.p.A.

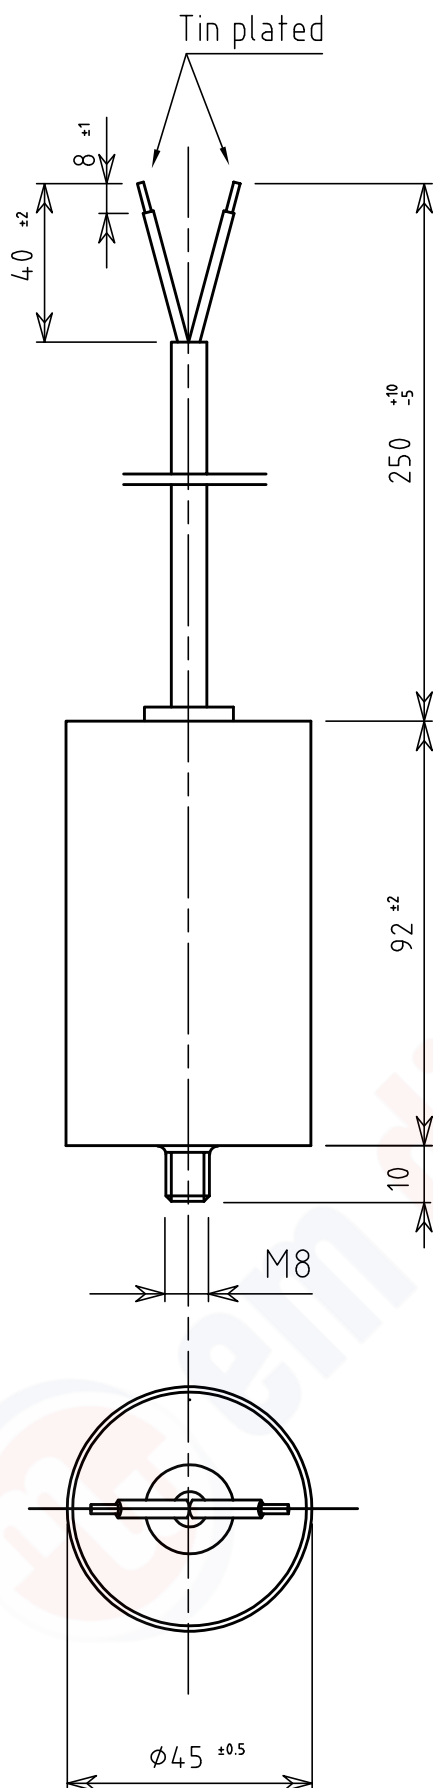

Characteristics:

Self healing metallized polypropylene film,
dry sealed with polyurethane resin.

Case and sealing cover
in self-extinguishing plastic material
(V2 class according UL-94 test).

Cable:

Flexible annealed copper cord 2x0.75mmq
insulated with PVC, H05V2V2-F type,
temperature resistance 90°C.

Capacitance / Tolerance: 40µF±5%

DUCATI part number: 416102914

Climatic category: -25/85/21

Protection degree: IP54

Operation classes and approvals: see marking

Reference standards: EN60252-1/A1

Marking:



416.10.29..

40 µF ±5%

425V~ 10000h/cl.B

475V~ 3000h/cl.C

-25/85/21 50-60Hz S0



EN 60252-1/A1


Ed.

Descrizione/Description

Data/Date Firma/Sign.

MODIFICHE/REVISIONS

DUCATI
energia s.p.a.



TOLL. QUOTE LIBERE
(TOLERANCE RATE)
UNI-ISO 2768-m

TOLL. QUOTE LIBERE ANG.
(ANG. TOLERANCE RATE)

SCALA/SCALE

DATA/DATE

FIRMA/DRAWN

VISTO/CHECKED

19/09/2022

E. Parm.

OGGETTO/PART NAME

Dimensions for metallized
polypropylene film capacitor for A.C. use.

CODICE/PART NR.

416102914

EDIZ./EDIT.