


The reproduction and/or divulgation of this drawing or its included informations is strictly prohibited unless authorized by the owning company DUCATI S.p.A.
E' vietata la riproduzione e/o la divulgazione di questo disegno unitamente alle informazioni in esso contenute senza l'autorizzazione della DUCATI S.p.A.

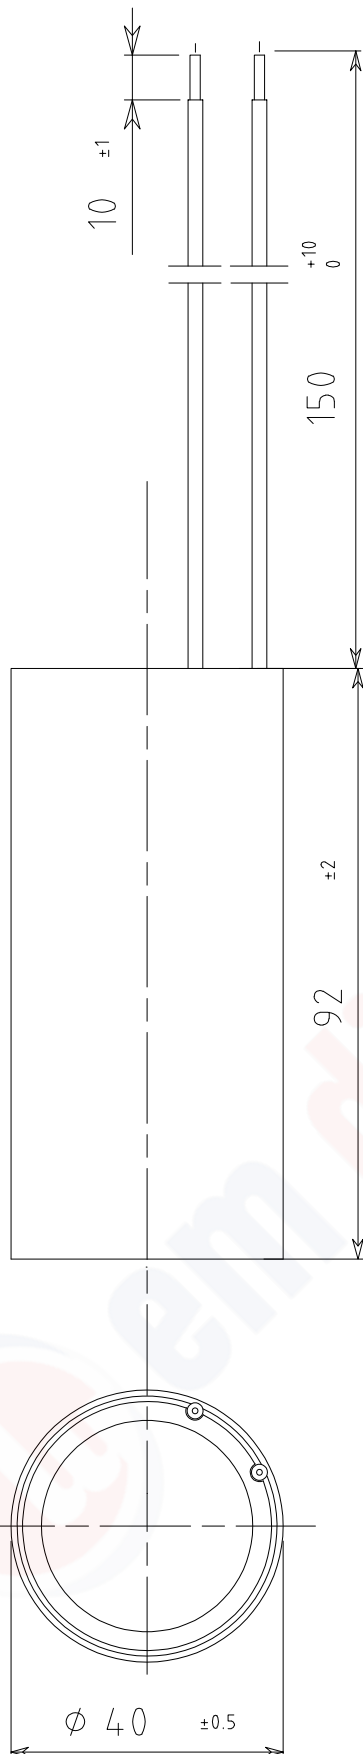

Characteristics:

Self healing metallized polypropylene film,
dry sealed with polyurethane resin.

Case and sealing cover
in self-extinguishing plastic material.

Leads:

Solid rigid annealed tinned copper wire
insulated with PVC, H05 V2-U type.

Nominal cross section 0.5mmq.

Temperature resistance 90°C.

Capacitance / Tolerance: 30µF±5%

DUCATI part number: 416107006

Climatic category: -25/85/21

Operation classes and approvals: see marking

Reference standards: EN60252-1/A1

Marking:



DUCATI
energia

416.10.70..

30 µF ±5%


425V ~ 10000h/cl.B

475V ~ 3000h/cl.C

-25/85/21 50-60Hz S0



EN 60252-1/A1

A	General update							12-09-2019	Ciccola	
Ed.	Descrizione/Description							Data/Date	Firma/Sign.	
MODIFICHE/REVISIONS										
DUCATI energia s.p.a.		TOLL. QUOTE LIBERE (TOLERANCE RATE) UNI-ISO 2768-m	TOLL. QUOTE LIBERE ANG (ANG. TOLERANCE RATE)	SCALA/SCALE	DATA/DATE	FIRMA/DRAWN	VISTO/CHECKED			
					14/10/2009	Mollica				
	OGGETTO/PART NAME					CODICE/PART NR.				
	Dimensions for metallized polypropylene film capacitor for A.C. use					416107006				
						EDIZ./EDIT.	A			